

ocean 12 XL

BERRY  ALLOC



bloom sand natural



gyant light sand



gyant sand natural



select light brown



gyant warm natural



100% water resistant



scratch resistance



fade & stain free



easy to install



easy to maintain




ideal for underfloor heating & cooling



4V


LIFETIME WARRANTY



AC5



ocean 12 XL

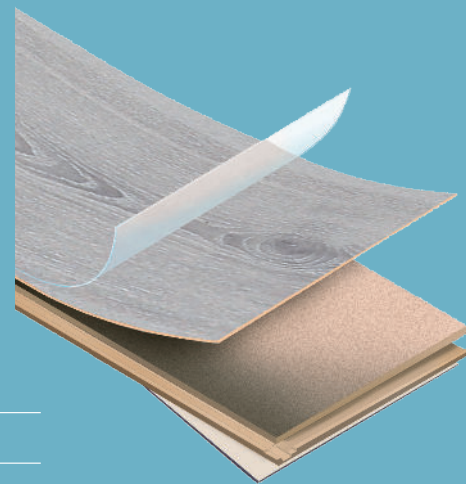

	contains	m2	ft2	weight
1 pack Ocean 12 XL	4 planks	1,96 m2	21.15 ft2	21,1 kg
1 pallet Ocean 12 XL	54 packs	106,09 m2	1141.94 ft2	1159 kg

product description

Dimensions	2038 x 241 mm
Total Thickness	12 mm
Bevels	4
Level of use according to European standard EN10874	23 heavy domestic use 33 general commercial use
Residential warranty	lifetime
Commercial warranty	10 years
Loc System	PentaLoc

Composition

Surface layer	Direct laminated paper, impregnated with melamine resin.
Substrate	Moisture resistant High Density Fiberboard (HDF) treated with hydro+ water repelling technology.
Backing	Direct laminated paper, impregnated with melamine resin.

tests results

Abrasion resistance	EN13329	AC5 (IP≥6000)
Impact resistance	EN13329	small ball : ≥ 70 mm - big ball : ≥ 1000 mm
Thickness swelling	ISO 24336	12% (requirement ≤ 15%)
Water resistance	ISO 4760	up to 24 hours
Fire resistance	EN13501-1	Cfl-S1
Formaldehyde emission	EN717-1	E1
Density	EN323	900 kg/m ³
Resistance to staining	EN438	5 (groups 1+2) ; 4 (group 3)
Effect of a furniture leg	EN16581	no damage (foot type 0)
Effect of a castor chair	EN425	no damage with type W wheels
Thermal resistance in combination with underlay Excellence Plus	ISO 8302	0,12 m ² K/W – Suitable for floor heating/cooling. Detailed instructions on www.berryalloc.com .
Slip resistance	EN13893	DS



made in Belgium

2038 x 241 x 12mm