


parqwood herringbone

Strong Wood Floors • strong wood floors

BERRY  ALLOC

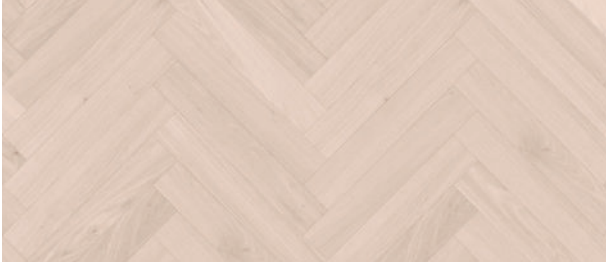

albatre




nude



silk



nature

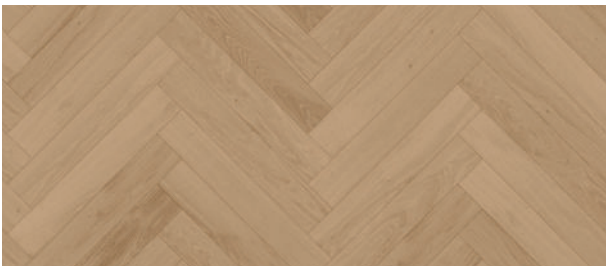

ambre



real
wood



water
resistance
7 - 10%



durable &
strong
class 33



10 times less
use of wood




healthy
interior



20 years
residential
warranty




Clear
Grade (A)



parqwood herringbone

strong wood floors • strong wood floors • strong wood floors

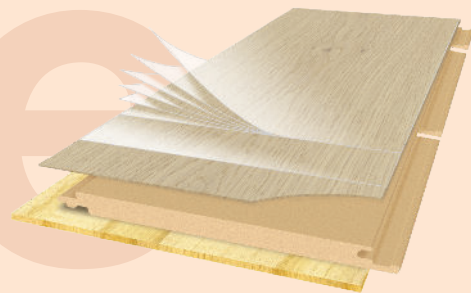

product description

Bevel	-	4
Oak layer thickness (+0/-0,1)	mm	0,6
Residential use guarantee	-	20 years
Class of use	ISO 10874	23 (heavy domestic use) 33 (heavy commercial use)
Total thickness	mm	9,5
Total weight	kg / m ²	8,5
Format	mm	84 x 504
Pack content	-	20 planks (6.32 kg, 0.847 m ²)
Pallet content	-	48 packs
Pallet size (h x w x l)	mm	694 x 815 x 1200

tests results

Moisture level	-	7 - 10%
Installation system	-	OmniLoc A & B
Surface treatment	-	Ultimtec high performance varnish
Resistance to abrasion	XP B 53-669	> 15 000 rev. (TT CS10)
Gloss level	Gloss 60	5+/-2 (matt)
Compatibility with underfloor heating	-	Compatible with electric radiant floor heating (max 90 W/m ²) and low-temperature hot water heating system (see conditions)
Thermal resistance	m ² K/W	0,055
Fire resistance	EN 13501-1 (oak)	Cfl-s1
CE marking	EN 14342	CE
Formaldehyde emissions	EN 717-1	E1
VOC emissions	ISO 16000-9	M1 / A
Environmental programme	Certification	PEFC/07-31-299

504 (L) x 84 (W)mm

made in Belgium