

# PERGO®

ORIGINAL LAMINATE

# DALEN



WHITE OAK



PURE OAK



WYNN OAK



NOLA OAK




VIRGIN OAK



LIV OAK




ZURI OAK

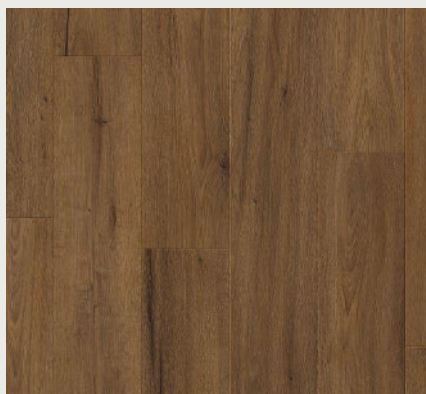

FERAL OAK

1261 x 192 x 8 mm | 4 WAY PRESSED BEVEL



## Product characteristics

FORMAT	Length(mm)	Width(mm)	Thickness	Planks/box	Sqm/box	Boxes/pallet	Sqm/pallet	Kg/pallet
Dalen	1261	192	8	9	2,179 m <sup>2</sup>	52	113.31	± 815

## General information

<b>Bevels</b>	with pressed in bevel all around
<b>usage class</b>	EN13329 - 32
<b>CE</b>	EN14041:2004 / AC: 2006 - DOP on pack
<b>UKCA</b>	EN14041:2004 / AC: 2006 - DOP on pack
<b>Wear resistance</b>	EN 13329 - ≥ 4 000 Cycles
<b>Wear class</b>	EN 13329 - AC4
<b>Impact resistance</b>	EN 13329 - ≥ 12 N
<b>Scratch resistance</b>	EN 438-2, 25 - Charge ≥ 5N
<b>Effect of a castor chair</b>	ISO 4918 (with underlay) - No charge
<b>Thickness swelling</b>	ISO 24336 - ≤ 12%
<b>Locking strength Long side</b>	ISO 24334 - ≥ 1 kN/m
<b>Locking strength Short side</b>	ISO 24334 - ≥ 2 kN/m
<b>Effect of a furniture leg</b>	EN 424 - No visible damage
<b>Resistance to staining</b>	EN 438 - Class 4/Class 5
<b>Light fastness</b>	EN ISO 4892 - Class 4
<b>Formaldehyde emission</b>	EN 717-1 - < 0,01
<b>Anti-Static</b>	EN 1815 - ≤ 2,0 kV
<b>Reaction to fire</b>	EN 13501-1 - Cfl-s1
<b>Thermal resistance</b>	EN 12667 - 0,055 m <sup>2</sup> K/W
<b>Slip resistance</b>	EN 13893 - DS: μ ≥ 0,30
<b>Warranty residential use</b>	20 years
<b>Warranty Commercial use</b>	10 years
<b>Warranty Water resistance</b>	10 years



ANTI-STATIC

CASTOR CHAIR

EASY INSTALLATION

EASIER CLEANING

HIGH FIRE RESISTANCE

BETTER ERGONOMICS

SCRATCH RESISTANCE

IMPACT RESISTANCE

SOUND RESISTANCE

WATER RESISTANCE

WEAR PROTECTION

EN14041:2018  
Heterogeneous PVC  
Floorcoverings ISO  
10582:2018

EN12667:2007+A1:2011  
Underlay for wall-to-wall use  
with self-adhesive floor coverings

floor score

PERFORMANCIA DANA L'USO AMBIENTALE  
A+  
A B C

epb

ABRASION CLASS FOR  
M1