

DD307 Chalked Oak



DD815 Blush Beige



DD208 Cashmere Charm



DD621 Dune Oak



DD146 Honey Oak




DD936 Soft Oak



DD765 Clay Cascade



DD394 Oatmeal Ash

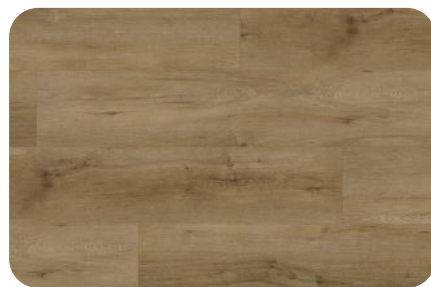

DD215 Linen Oak




DD701 Caffè Latte



DD473 Stone Grey



DD603 Crystal Pine

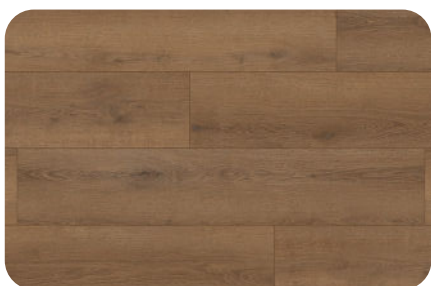

DD800 Toasted Toffee



DD104 Borough Oak



DD372 Pecanwood

deZIGN
THE ART OF FLOORING

series 200.

TECHNICAL SPECIFICATIONS

SUBJECT	MAIN PARAMETER	SPECS.
GENERAL INFORMATION - LVT IS A FULL BOND GLUE DOWN INSTALLATION		
Thickness	2.0 mm	
Wear Layer	Class 31/0.30 mm	
Packaging Unit	12pieces/box = 3.345 m ²	
Plank Size	228.6 x 1219.2 x 2 mm	
Application	Heavy domestic, light commercial	
Guarantee	15 year residential 5 year commercial	

TECHNICAL DATA		
Name	deZign S200	ISO 10874
Type of flooring	Heterogeneous PVC floor covering	ISO 10582
Classification	23/31	
Component	PVC plasticizer Stabilizer CaCO ₃	
Finish	Regular Emboss SEMI-MATT finish.	
Structure	Composite (Wear Layer: 0.30mm; Print film: 0.07mm; Back Layer: 1.63mm)	ISO 24342
Size	Deviation ≤0.15% of nominal length up to 0.5mm maximum	ISO 24342
Squareness, mm	≤400mm deviation≤0.25; >400mm, ≤0.35>400mm, ≤0.35	ISO 24342
Straightness, mm	≤400mm deviation≤0.25; >400mm, ≤0.35>400mm, ≤0.35	ISO 24346
Overall thickness, mm	Average: 2.0mm + 0.13/-0.10mm, individual value: average +/- 0.15mm	ISO 20340
Wear layer thickness, mm	0.30mm +13%/-10%	
Surface treatment	PU coating	
Bevelled edges	No	ISO 105-B02
Colour Fastness	Minimum 6	ISO 23999
Dimensional Stability	≤0.25%	ISO 23997
Total Mass Per Unit Area	3.444 kg/m ² + 13%/-10%	ISO 24343-1
Residual Indentation (average)	≤0.10 mm	EN 13501-1
Reaction to fire	Bfl-s1	ISO 26987
Chemical resistance	Class 0, excellent	ISO 4918
Effect of a castor chair	20 00 cycle no delamination	DIN 51130
Slip Resistance	≥R9	EN 13893
	DS	
Hardness	60°+/-5°	EN660-2
Abrasion Resistance	Group T	EN71-3
Toxicity	Non-toxic, no heavy metals	EN 717-1
Formaldehyde Emission	E1	
Recycled Materials	No	

INSTALLATION & MAINTENANCE GUIDELINES		
Installation	Adhere to manufactures installation parameters	
Cleaning & Maintenance	Non-abrasive detergent & micro fibre mop	
	Avoid excessive exposure to water	
Caution	Do not expose to direct sunlight	