





FLOORPAN CLASSIC

FC062 - ATLAS

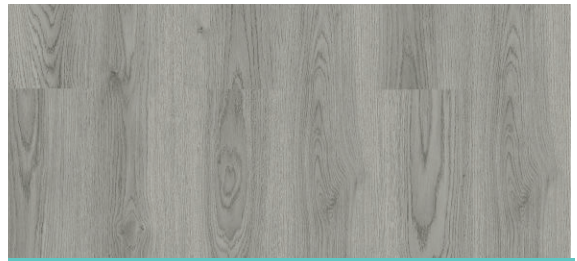


FLOORPAN CLASSIC

FC092 - GRISTA OAK

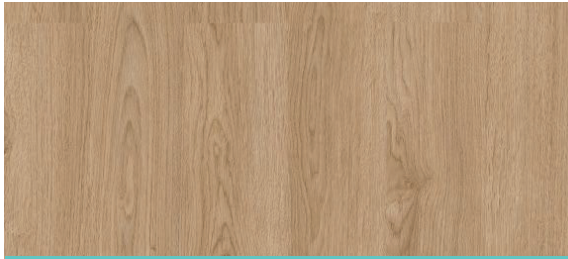

FLOORPAN CLASSIC

FC093 - SAVANI OAK

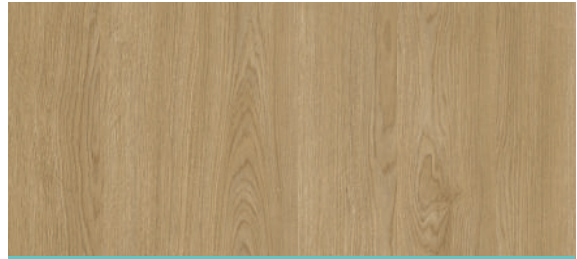

FLOORPAN CLASSIC

FC094 - SUNNY OAK




FLOORPAN CLASSIC

006 - STORK



FLOORPAN CLASSIC

009 - LEFKAS

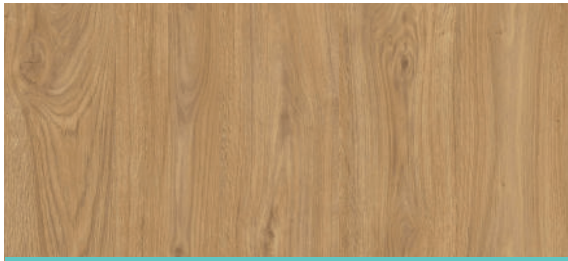

FLOORPAN CLASSIC



052 - LIMA

**15 YEARS**  
DOMESTIC USE  
GUARANTEE

  
**32**  
**AC4**  
10 YEARS  
COMMERCIAL USE  
GUARANTEE



**CLASSIC**  
SPEC SHEET

|                          |    |   |               |
|--------------------------|----|---|---------------|
| <b>THICKNESS</b>         | mm | 8   | EN 13329 + A1 |
| <b>WIDTH</b>             | mm | 249   | EN 13329 + A1 |
| <b>LENGTH</b>            | mm | 1205  | EN 13329 + A1 |
| <b>SURFACE</b>           |    | Timberland  |               |
| <b>EUROPEAN STANDARD</b> | -  |   | EN 13329      |

## PACKAGE DETAILS

|              |  |                     |
|--------------|--|---------------------|
| <b>PIECE</b> |  | 8 piece / 1 package |
| <b>M2</b>    |  | 2,40 m2             |
| <b>KG</b>    |  | 17.5 kg             |

## PALLET DETAILS

|              |  |                     |
|--------------|--|---------------------|
| <b>PIECE</b> |  | 45 boxes / 1 pallet |
| <b>M2</b>    |  | 108 m2              |
| <b>KG</b>    |  | 787.5 kg            |

|   |                     |                            |                        |
|---|---------------------|----------------------------|------------------------|
| <b>CLASS</b>                                  | -                   | 32                         | EN 13329+A1            |
| <b>ABRASION RESISTANCE</b>                    | -                   | AC4                        | EN 13329+A1            |
| <b>THICKNESS SWELLING</b>                     | %                   | ≤18                        | ISO 24336              |
| <b>RESISTANCE TO IMPACT</b>                   | SMALL BALL          | N                          | ≥8                     |
|   | LARGE BALL          | mm                         | ≥500                   |
| <b>WARRANTY DOMESTIC / COMMERCIAL</b>         | Years               | 10/5                       | -                      |
| <b>RESISTANCE TO STAINING</b>                 |                     | -                          | Min. 5 (group 1 and 2) |
|   |                     |                            | Min. 4 (group 3)       |
| <b>SURFACE SOUNDNESS</b>                      | N/mm <sup>2</sup>   | ≥1.0                       | EN 13329+A1            |
| <b>LOCK STRENGTH</b>                          | LENGTH              | kN/m                       | -                      |
|   | WIDTH               | kN/m                       | -                      |
| <b>EFFECT OF CASTOR CHAIR</b>                 | "25.000 Cycles"     | No Damage                  | EN 425:2002b           |
| <b>EFFECT OF A FURNITURE LEG</b>              | -                   | No damage shall be visible | EN 424                 |
| <b>OPENING BETWEEN ELEMENTS. (0)</b>          |                     | mm                         | "0 average ≤ 0,15 mm   |
|   |                     |                            | 0 max. ≤ 0,20 mm"      |
| <b>HEIGHT DIFFERENCE BETWEEN ELEMENTS (H)</b> |                     | mm                         | h average ≤ 0,10 mm    |
|   |                     |                            | h max. ≤ 0,15 mm       |
| <b>MOISTURE CONTENT</b>                       | %                   | 4-10                       | EN 322                 |
| <b>FIRE RESISTANCE</b>                        | Class               | CflS1                      | EN 9239-1              |
| <b>FORMALDEHYDE RELEASE</b>                   | mg/m <sup>2</sup> h | ≤3,5 (E1)                  | EN 12460-3             |

