

FLOORPAN

Laminate Flooring




FLOORPAN FIX
FF003
BORA




FLOORPAN FIX
FF004
SAMYELI



FLOORPAN FIX
FF005
MISTRAL

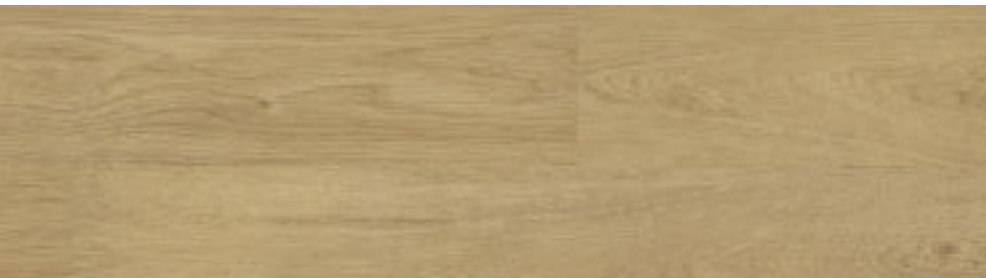


FLOORPAN FIX
FF006
MUSON

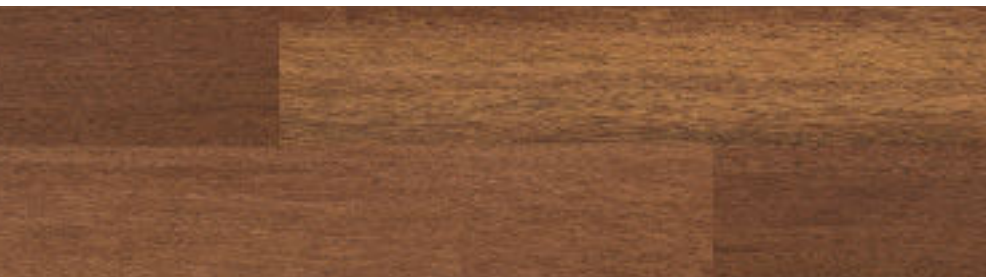

FLOORPAN FIX
FF007
JAKARTA MERBAU



FIX
SPEC SHEET

THICKNESS	mm	7	EN 13329 + A1
WIDTH	mm	197	EN 13329 + A1
LENGTH	mm	1205	EN 13329 + A1
SURFACE	AUTHENTIC		
EUROPEAN STANDARD	-		EN 13329

PACKAGE DETAILS	
PIECE	12 piece / 1 package
M2	2,849 m2
KG	17 kg

PALLET DETAILS	
PIECE	60 package / 1 pallet
M2	170,94 m2
KG	1060 kg

CLASS	-	31	EN 13329+A1	
ABRASION RESISTANCE	-	AC3	EN 13329+A1	
THICKNESS SWELLING	%	≤18	ISO 24336	
RESISTANCE TO IMPACT	SMALL BALL	N	≥8	EN 13329+A1
	LARGE BALL	mm	≥500	
WARRANTY DOMESTIC / COMMERCIAL	Years	10/5	-	
RESISTANCE TO STAINING	-	Min. 5 (group 1 and 2)	EN 438-2_5	
	-	Min. 4 (group 3) ≥1.0		
SURFACE SOUNDNESS	N/mm ²	≥1.0	EN 13329+A1	
LOCK STRENGTH	LENGTH	kN/m	-	ISO 24334
	WIDTH	kN/m	-	
EFFECT OF A CASTOR CHAIR	"25.000 Cycles"	No Damage	EN 425:2002	
EFFECT OF A FURNITURE LEG	-	No Damage	EN 424	
OPENING BETWEEN ELEMENTS	mm	≤0,20	EN 13329+A1	
HEIGHT DIFFERENCE BETWEEN ELEMENTS	mm	≤0,15	EN 13329+A1	
MOISTURE CONTENT	Class	Cf1S1	EN 9239-1	
FIRE RESISTANCE	mg/m ² h	≤3,5 (E1)	EN 12460-3	
FORMALDEHYDE RELEASE	Class	DS	EN 13893:2002	
SLIP RESISTANCE	(m ² K)/W	0,05	EN 12667:2001	

THERMAL RESISTANCE

