


FLOORPAN STREET

FST005 - VILAKAZI



FLOORPAN STREET

FST009 - GINZA

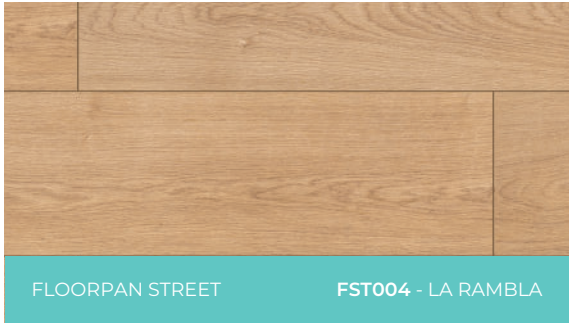


FLOORPAN STREET

FST004 - LA RAMBLA



FLOORPAN STREET

FST003 - LOMBARD

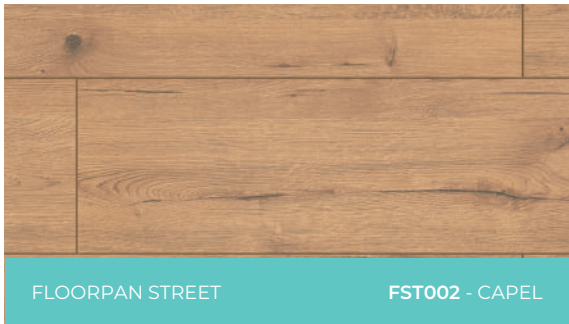


FLOORPAN STREET

FST002 - CAPEL




FLOORPAN STREET

FST008 - ERNE OAK

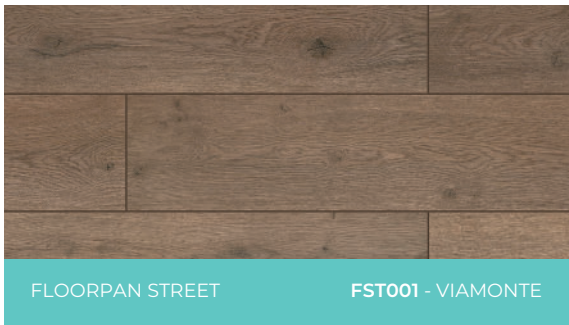

FLOORPAN STREET

FST001 - VIAMONTE

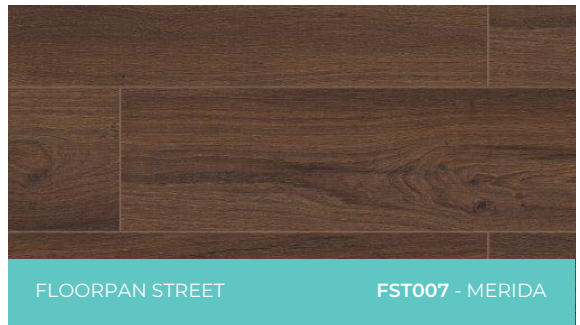

FLOORPAN STREET



FST007 - MERIDA

15 YEARS
DOMESTIC USE
GUARANTEE


32
AC4
10 YEARS
COMMERCIAL USE
GUARANTEE



STREET
SPEC SHEET

THICKNESS	mm	8	EN 13329 + A1
WIDTH	mm	249	EN 13329 + A1
LENGTH	mm	1205	EN 13329 + A1
SURFACE		Timberland	
EUROPEAN STANDARD	-	 	EN 13329

PACKAGE DETAILS

PIECE		8 piece / 1 package
M2		2,40 m2
KG		17.5 kg

PALLET DETAILS

PIECE		45 boxes / 1 pallet
M2		108 m2
KG		787.5 kg

CLASS	-	32	EN 13329+A1
ABRASION RESISTANCE	-	AC4	EN 13329+A1
THICKNESS SWELLING	%	≤18	ISO 24336
RESISTANCE TO IMPACT	SMALL BALL	N	≥8
	LARGE BALL	mm	≥500
WARRANTY DOMESTIC / COMMERCIAL	Years	10/5	-
RESISTANCE TO STAINING		-	Min. 5 (group 1 and 2)
			Min. 4 (group 3)
SURFACE SOUNDNESS	N/mm ²	≥1.0	EN 13329+A1
LOCK STRENGTH	LENGTH	kN/m	-
	WIDTH	kN/m	-
EFFECT OF CASTOR CHAIR	"25.000 Cycles"	No Damage	EN 425:2002b
EFFECT OF A FURNITURE LEG	-	No damage shall be visible	EN 424
OPENING BETWEEN ELEMENTS. (0)		mm	"0 average ≤ 0,15 mm
			0 max. ≤ 0,20 mm"
HEIGHT DIFFERENCE BETWEEN ELEMENTS (H)		mm	h average ≤ 0,10 mm
			h max. ≤ 0,15 mm
MOISTURE CONTENT	%	4-10	EN 322
FIRE RESISTANCE	Class	CflS1	EN 9239-1
FORMALDEHYDE RELEASE	mg/m ² h	≤3,5 (E1)	EN 12460-3

