

PERGO®

ORIGINAL LAMINATE

KUNGSHAMN




CRAFT OAK




HAZELWOOD OAK




HERITAGE OAK

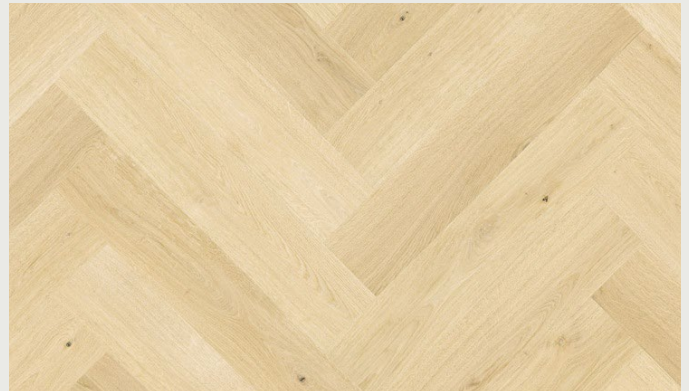

IVORY OAK

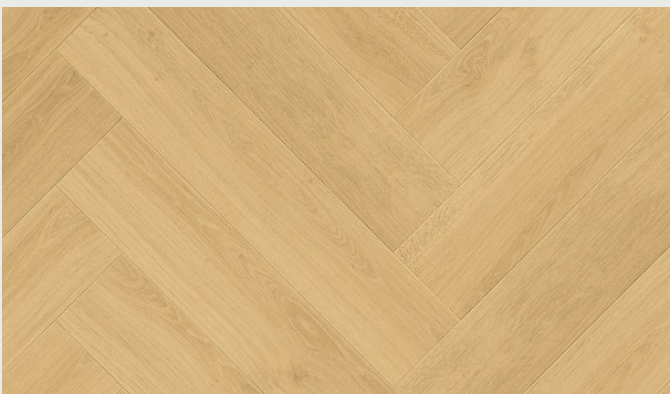

SILK OAK

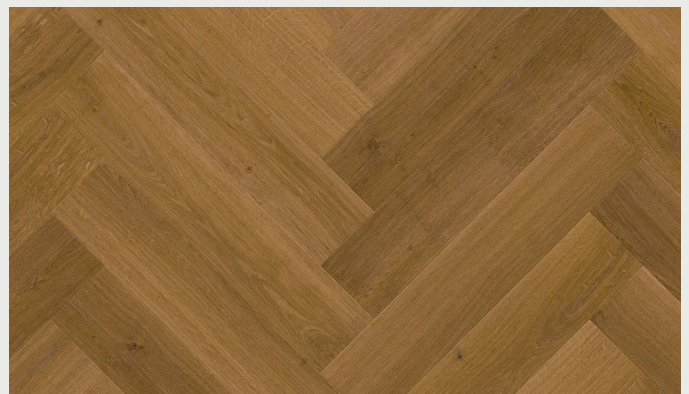

SMOKED AMBRE

PRESSED BEVEL



Product characteristics

FORMAT	Length	Width	Thickness	Planks/box	Sqm/box	Tongue & Groove	Water resistance warranty
Kungshamn	655 mm	131 mm	8 mm	14	1,201 m2	Unizip	15 Years 72 Hours (stagnating water)

General information

Bevels	with pressed in bevel all around
Usage class	EN ISO 10874
CE	EN 14041:2004+AC:2005+AC:200 Notified body
UKCA	EN 14041:2004+AC:2005+AC:2006 Approved Body
Wear resistance	ISO 24338 - Prodecure A - $\geq 4\ 000$ Cycles
Wear class	EN 13329 - AC4
Impact resistance	EN 17368 - ≥ 35 mm EN 13329 ≥ 600 mm
Scratch resistance	EN 438-2, 25- Charge ≥ 3 N
Effect of a castor chair	EN ISO 4918 (with underlay) - 15000 cycles
Thickness swelling	ISO 24336 - $\leq 18\%$
Locking strength Long side	ISO 24334 - ≥ 1 kN/m
Locking strength Short side	ISO 24334 - ≥ 2 kN/m
Effect of a furniture leg	EN ISO 16581 - No visible damage
Surface soundness	EN 13329 - $\geq 1,25$
Static indentation	EN ISO 24343-1 - $\leq 0,05$ mm(residential indentation)
Resistance to staining	EN 438-2 - Class 4/Class 5
Light fastness	EN ISO 4892-2:2013 procedure B -cycle 2/ 5- Class 4
Formaldehyde emission	EN 717-1 - $< E0,5$
Anti-Static	EN 1815 - $\leq 2,0$ kV
Reaction to fire	EN 13501-1 - Cfl-s1
Thermal reistance	EN 12667 - $0,055$ m2K/W
Slip resistance	EN 13893 - DS: $\mu \geq 0,30$
Warranty residential use	Lifetime (Warranty Water resistance Residential-15 years)
Warranty Commercial use	5 years (Warranty Water resistance Residential-5 years)

